

STINGER® HPL OR STINGER DS® HPL
HIGH LUMEN LONG RANGE RECHARGEABLE FLASHLIGHT

MARKET
APPLICATIONS: Law Enforcement, Sporting Goods, Security, Fire & Rescue, Hardware/Tool, Automotive, Industrial, Consumer

DESCRIPTION: Compact & extremely powerful, the Stinger® HPL and Stinger DS® HPL rechargeable flashlights offer 3 microprocessor controlled variable intensity modes, strobe mode and the latest in high power LED technology. The Stinger DS® HPL includes a second independent easy to locate tactical tailcap switch. The combination of rechargeable batteries and the C4® LED results in one of the lowest operating costs of any flashlight made.

CASE MATERIAL: 6000 series machined aircraft aluminum with non-slip rubberized comfort grip.

DIMENSIONS: Stinger® HPL Length: 9.23 in. (23.44 cm) Diameter: Major Diameter: 2.20 in. (5.59 cm)
 Stinger DS® HPL Length: 9.65 in. (24.51 cm) Body Diameter: 1.17 in. (2.97 cm)

WEIGHT: Stinger® HPL: 13.6 oz (385 grams)* Stinger DS® HPL: 14.0 oz (396 grams)*

LENS: Unbreakable polycarbonate with scratch-resistant coating. O-ring sealed.

LIGHT SOURCE: High power LED, white, impervious to shock with a 50,000 hour lifetime.

LIGHT OUTPUT: See Chart. Optimized electronics provides regulated intensity.
 Deep-dish parabolic reflector produces a long range targeting beam with optimum peripheral illumination.

ON/OFF: Multi-function, easy access head mounted push-button switch designed for extremely long life; tested at 1 million actuations. Stinger DS® HPL provides a second multi-function push-button tactical tailswitch where both switches offer full feature control independent of each other.

RUN TIME: See Chart. All claims to 10% of initial lumen output. Strobe: 3 continuous hours.

BATTERY: 3-cell, 3.6 Volt, 2.6Ahr Ni-MH sub-C battery, rechargeable up to 1000 times.

CHARGE HOLDERS: Fits existing Stinger® chargers and new Smart chargers.
 Steady charger: Fully recharges within 16 hours.
 Smart charger: Fully recharges within 4.5 hours (5V/1A USB input) or 3 hours (12VDC input).
 Smart PB charger: Fully recharges within 7.5 hours (5V/1A USB input) or 4 hours (12VDC input).

CHARGE CORDS: Streamlight universal AC input voltage, 5V/1A USB or 12.7V/.8A output charge cords available with IEC Type A (US & Japan), Type C (Euro), Type G (UK) or Type I (Australia) plugs.
 12VDC cigarette lighter or direct wire automotive cords.

FEATURES:

 High power LED for extreme brightness.
 IPX4 Rated for water resistant operation.
 3 meter impact resistance tested.
 Serialized for positive identification.
 LED Charge-continuity indicator on charger base.
 Compact, snap-in charger mounts in any position.

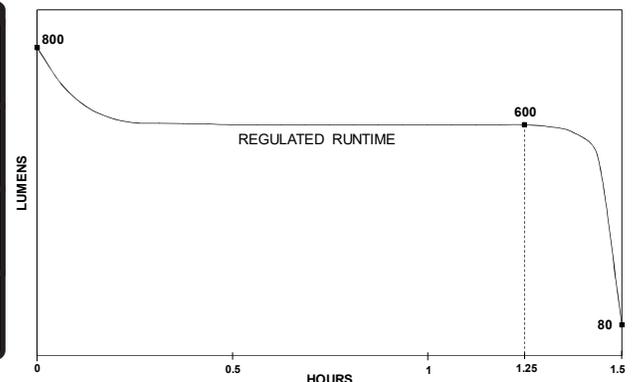
WARRANTY: Streamlight's Limited Lifetime Warranty.

APPROVALS: **CE** Meets applicable European Community Directives.

(BC) CEC Compliant (Smart charger models only)

OPTIONAL ACCESSORIES: Safety wands, Ring holder, 2.6Ah Li-Ion battery, 5-unit bank charger, Smart charger, Steady charger or Smart PiggyBack® charger that allows for simultaneous charging of light and battery.

	FL 1 STANDARD	HIGH	MEDIUM	LOW
OUTPUT		800 LUMENS	400 LUMENS	200 LUMENS
RUN TIME		1h 30min	2h 30min	5h
DISTANCE		438m	310m	219m
INTENSITY		48,000cd	24,000cd	12,000cd

STINGER HPL PERFORMANCE CURVE


*With battery (included in purchase)

All performance claims to ANSI/PLATO FL1-2016 Standard

Issued: 10/31/2014

Revised: 05/08/2019 Rev: 2

Engineered in the USA, manufactured in China

Document #230