




DUALIE® 3AA LASER INTRINSICALLY SAFE MULTI-FUNCTION FLASHLIGHT



Integrated spring-loaded belt clip

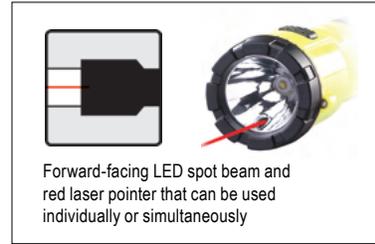

Forward-facing LED spot beam and red laser pointer that can be used individually or simultaneously

Material/Lens Impact and chemical resistant Engineered Polymer resin; v-ring sealed and vented; gasket sealed and vented. Available in high visibility yellow or black.

| | | | | | |
|-------------|----------|-------------------------------------|-------------------------|---|----------------------------|
| Dims/Weight | IMPERIAL | LENGTH: 7 in | BODY THICKNESS: 1.06 in | BODY WIDTH: 1.52 in | FACE CAP DIAMETER: 1.86 in |
| | | WEIGHT (WITH ALK BATTERIES): 6.8 oz | | WEIGHT (WITH LITHIUM BATTERIES): 5.9 oz | |
| | METRIC | LENGTH: 17.78 cm | BODY THICKNESS: 2.69 cm | BODY WIDTH: 3.86 cm | FACE CAP DIAMETER: 4.72 cm |
| | | WEIGHT (WITH ALK BATTERIES): 193 g | | WEIGHT (WITH LITHIUM BATTERIES): 167 g | |

Light Source/Output 1 White LED, impervious to shock with a 50,000 hour lifetime. One (1) red laser, 640nm - 650nm; Class 3R laser shock proof mounting.

| | SPOT | 5mW LASER | COMBINED |
|----------|----------|-----------|----------|
| LUMENS | 150 | --- | --- |
| CANDELA | 7,700 | --- | --- |
| DISTANCE | 175 m | --- | --- |
| RUN TIME | 17 hours | 70 hours | 12 hours |

Switch Opposing head switches for easy identification. Spot LED or Laser push-button head switch provides on/off operation.

Battery Three (3) "AA" size alkaline or lithium primary batteries. Mechanical battery polarity protection.

- Features**
- Dual function with opposing switches for easy function identification
 - IP67-rated; dust-tight and waterproof to 1 meter for 30 minutes; 2m impact resistance tested
 - Spot beam utilizes smooth parabolic reflector for tight beam with optimum peripheral illumination
 - Corrosion proof

Approvals Class I, II, Division 1, Groups A, B, C, D, E, F, G; Class III; CL I, ZN 0, IIC; Exia; T-Code: T4. MSHA Permissible Handheld Flashlight. Approval No. 20-A160001-0. Tested for Intrinsic Safety in Methane-Air mixtures only. Charge or replace batteries in fresh air only.

II 1G Ex ia op is IIC T3/T4 Ga; FTZU 15ATEX0221X, IECEx FTZU 16.0017X
Meets applicable European Community Directives
*See product for specific ratings. All performance claims to ANSI/PLATO FL1-2016 Standard

Warranty Streamlight warrants this product to be free of defects for a lifetime of use except for batteries and bulbs, abuse and normal wear. We will repair, replace or refund the purchase price of this product should we determine it to be defective. This limited lifetime warranty also excludes rechargeable batteries, chargers, switches and electronics which have a 2 year warranty with proof of purchase. THIS IS THE ONLY WARRANTY, EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES ARE EXPRESSLY DISCLAIMED EXCEPT WHERE SUCH LIMITATION IS PROHIBITED BY LAW. You may have other specific legal rights which vary by jurisdiction. Visit streamlight.com for full warranty information.

| Description | UPC | Item # |
|---|----------------|--------|
| Dualie 3AA Laser with 3 "AA" alkaline batteries - Clam - Yellow | 080926-68760-8 | 68760 |
| Dualie 3AA Laser with 3 "AA" alkaline batteries - Clam - Black | 080926-68762-2 | 68762 |

| | Description | UPC | Item # |
|---|----------------------|----------------|--------|
|  | 4AA/3AA Helmet Mount | 080926-68085-2 | 68085 |
|  | 4AA/3AA Gallet mount | 080926-68086-9 | 68086 |
|  | Poly Mount Kit | 080926-68089-0 | 68089 |
|  | Rubber Helmet Strap | 080926-99075-3 | 99075 |